




Thermo-Gen® Fogger

Produces a true dry fog at a particle size of .25 to 50 microns. Small particle size allows complete penetration of contaminated surfaces as well as reduction of airborne odor particles. The fog produced by the Thermo-Gen follows the same path as smoke and odors, reaching into cracks, crevices and voids. Durable stainless steel construction. Fogs solvent or water-based solutions. The Thermo-Gen can fog 0-14 gallons of water or oil-based counteractant, such as Thermo-55®, or Thermo-2000® per hour. Gasoline powered. Removable formulation tank, which holds 68 ounces of fuel or enough for 1.25 hours of use.

Item No	Description	Unit
57821	104287000 Thermo-Gen Fogger	Each

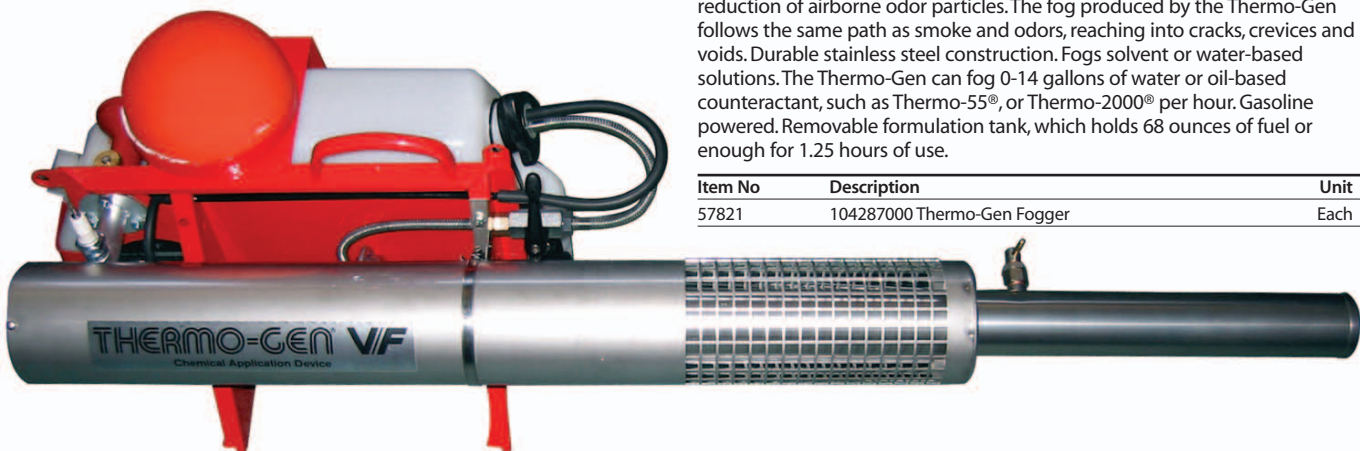

Tri-Jet



Adjustable output is a key feature of this rugged, portable cold fogger. Control knob provides the desired degree of misting of both water and oil-based solutions. The accurate and constant dispensing rate is easy to calibrate in the field, regardless of liquid density or viscosity. Adjustable head for your choice of angles.

Item No	Description	Unit
6208	Tri-Jet Fogger	Each
6428	Tri-Jet Drum Service Unit	Each



Cyclone ULV



The ultraprecise metering valve assures ULV microscopic particles under 20 microns regardless of flow rate and viscosity of material. Features the full benefit of ultralow volume method of dispensing the SNL Decon Formulation.

Item No	Description	Unit
2730	Cyclone 110 Volt	Each
2732	Cyclone 220 Volt	Each



Electro-Gen® Fogger



A versatile odor control application tool that produces "dry fog" on the order of smoke itself rather than the damage-causing wet particles produced by conventional mister and foggers. Remove the barrel and the Electro-Gen also can be used as an electric sprayer to apply solvent or water based chemicals for deodorizing, disinfecting, flame proofing, pest control, fabric protecting, etc. Converts one ounce of Thermo-55® into a 2000 cubic foot deodorizing cloud in just 30 seconds. Specially insulated barrel produces smallest particle size.

Item No	Description	Unit
102257000	Electro-Gen Fogger	Each



Fogger/Mister

A two-gallon standard grade, 110V AC, 60 Hz, 5.5 Amp single-stage fan unit. Excellent for misting asbestos projects.



Item No	Description	Unit
57323	Fogger/Mister	Each